

TECKNET

TECKNET BH922 Wireless Headset





Welcome

Thank you for choosing this TECKNET product. To ensure optimum performance and safety, please read these instructions carefully before operating this product. It is strongly recommended you keep this manual for future reference.

TeckNet BH922 is a Stereo Bluetooth Headset and it's capable of receiving stereo music and calls from your phone via Bluetooth wireless transmission, so you can enjoy your music and phone calls, even while you are walking or exercising.

Product Layout

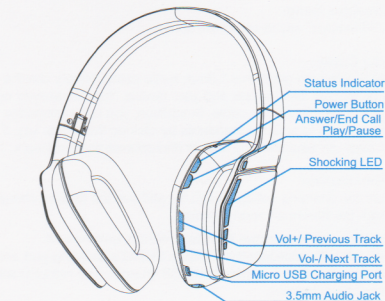

01

Package Contents

- 1 x TeckNet BH922 Headset
- 1 x USB Charging Cable
- 1 x 3.5mm Audio Cable
- 1 x User Manual
- 1 x Warranty Card

Technical Specifications

Bluetooth:	Bluetooth CSR V4.1
Battery Capacity:	400mAh
Charging Current:	60mAh
Driver Size:	40mm
Impedance:	32Ω
Sensitivity:	112±3dB
Frequency Range:	20-20000HZ
Microphone Unit:	4x1.5mm
Operating Distance:	Up to 10m
Music Play time:	about 12 hours
Standby Time:	about 180 hours
Charging Time:	about 3 hours

Features

1. Super soft over-head pad gives you comfortable experience and don't need to worry the Headset will slide off.
2. Two large 40mm Dia HIFI speaker driver units give the best atmospheric.
3. Built-in and noise-cancelling microphone. Lightweight design lets you play comfortably.
4. Padded headband and speakers for ambient noise exclusion and comfort during long sessions.
5. Good response for voice communications and in-game audio with extended bass.

Power On/Off

Power On: Press "Power" key for 2 seconds, the status indicator will turn on, the red light and blue light flash alternately, along with voice prompt "Du~~", outer shocking LED also turns on.

Power Off: Press "Power" key for 2 seconds, the status indicator will turn off, along with voice prompt "Du~~".

02

Mobile Phone

Pairing the BH922 with your mobile device:

1. Turn on TeckNet BH922, the Headset will enter pairing mode automatically.
 2. Switch on your mobile phone's (or other device's) Bluetooth search function and your mobile phone will display the "TeckNetBH922".
 3. Select "TeckNetBH922" to pair. The blue light will flash along with voice prompt "Di-Du" once pairing is completed.
- Note: a. If pairing is failed, delete the icon of "TeckNet BH922" on the mobile and search again.
b. BH922 will re-connect the mobile phone automatically if the pairing is successful.
c. If pairing remains unsuccessful, please retry steps 1 to 3 again.
d. BH922 will exit pairing mode and turn off if there is no pairing within 10 minutes.

Answer a call:

Press the "Answer" key once to answer the call or use your mobile phone to answer the call.

End a call:

Press the "End" key once to end the call after you have answered it, or use your mobile phone to end the call.

Reject a call:

Press the "End" key about 2-3 seconds to reject the call or use your mobile phone to reject the call.

Redial a call:

Press the "Answer" key twice to re-dial the last call.

Reconnect:

TeckNet BH922 will reconnect your device when the headset is disconnected. If reconnection is failed, please try pairing step 1-3.

Transfer Audio:

After pairing, if you want to make a call, your mobile phone will display three options "TeckNet BH922", "Your mobile phone", "Speaker", you can select one for the call.

Play Music

Volume Adjustment:

Hold "Vol+" / "Vol-" to increase or decrease the volume. When it reaches the max/min volume, you will hear a warning tone.

Pause/Resume Music:

Click the "Play" key to pause the music and click the "Play" key again to resume playing.

Play Next/Previous Song:

Press "Next"/"Previous" key to select the songs.

3.5mm Audio Cable:

TeckNet BH922 offers an additional 3.5mm audio cable. Simply use the audio cable to connect the Headset and your device. You can answer or end call, play or pause music via this cable. In addition, you can change the international standard to national standards by clicking the toggle key, if sound is not clear, no sound at one side or microphone does not work.

Charging the Headset

Please ensure the charging voltage is DC 5V and use the original charging cable to charge the Bluetooth sport Headset.

1. Before charging, make sure the TeckNetBH922 is switched off.
2. Plug the micro USB cable into the TeckNet BH922's charging port and connect the other end of the cable to a USB charger. The red LED will be illuminated during charging.
3. It will take about 3 hours to charge, the red light will switch off while the blue light on when it's completely charged.

Safety Precautions

Thank you for choosing this TeckNetBH922 Stereo Sport Bluetooth Headset. We hope you are satisfied with this product and we believe you will enjoy the experience of safely taking phone calls while you are exercising or listening to music. Please be aware of the following guidelines when you using the Bluetooth Headset.

1. Do not use at high volume for a long period of time to avoid noise-induced hearing damage.
2. Adjust to a reasonable volume and length of time when listening to music.
3. If you feel uncomfortable when using the Headset, try to reduce the volume or switch it off.
4. This Headset is not recommended to use while you are driving or biking.
5. To reduce unnecessary distraction, please avoid using the Headset to listen to music, make or receive phone calls in any hazardous environments.

Warning

Please read all instructions and warnings prior to using this product for the first time. Failure to read and follow these safety and usage instructions could result in fire, explosion, electric shock or other hazard that could potentially cause property damage or even fatal injury.

1. Do not modify, disassemble, open, drop, crush, puncture or shred the product.
2. Do not expose the product to water or excessive moisture.
3. Do not wash the Headset with harsh chemicals or soaps detergents.
4. Keep away from high voltage devices, direct exposure to heat or sunlight.
5. Keep it out of reach of children, contains small parts and cords that may pose risk of choking.

Disclaimer

Every effort has been made to ensure that the information and procedures in this guide are accurate and complete, no liability can be accepted for any errors or omissions and we reserve the right to make any changes without further notice to any products mentioned herein.

Warranty

We warrant that product from authorized distributors will meet the applicable product specifications and be free from all defects in design, assembly, material and workmanship. Please contact TECKNET retailers, or visit our website www.tecknet.co.uk for more information.

scanned by tinkerersblog.net